

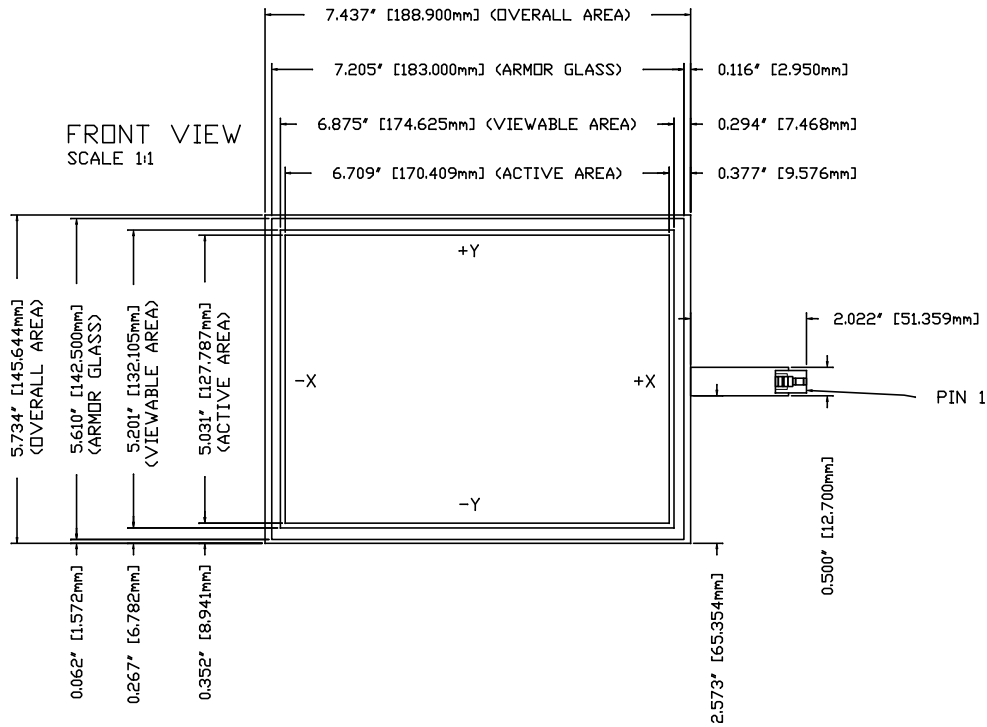


REVISIONS			
LT	DESCRIPTION	DATE	BY
A	INITIAL RELEASE	02-23-09	DZ
B	UPDATE DRAWING INFORMATION	07-06-09	DZ

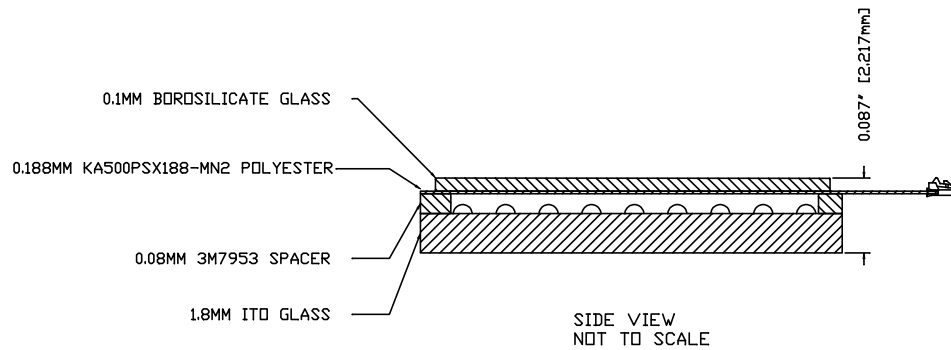

PIN	PIN
1	-X
2	-Y
3	+X
4	+Y

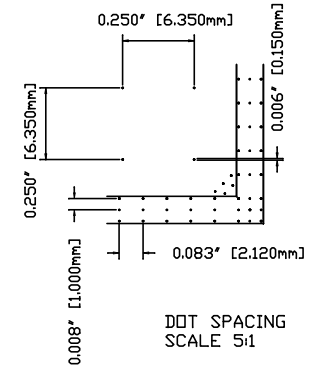

NOTES:

1. SUBSTRATE: 1.8MM ITO GLASS
2. ALL DIMENSIONS IN INCHES [MILLIMETRES]
3. SAFETY SEAM ON ALL EDGES
4. CABLE: INTEGRATED POLYESTER TAIL
5. CONNECTOR: 4 PIN AMP CONNECTOR WITH 0.1" [2.54MM] CENTERS, LATCHING, PART NUMBER 487526-3
6. TOUCH SCREEN TO BE ACTIVATED WITHIN ACTIVE AREA ONLY. AREA BETWEEN ACTIVE AND VIEWABLE AREAS MUST HAVE A SCREENED ON DIELECTRIC AND CONDENSED DOTS
7. SENSOR THICKNESS: APPROX. 0.087" [2.217MM]

		A D METRO - 1388 PARKSIDE ST - OTTAWA, ONTARIO	
AD8.4ULTRA			
TOLERANCING UNLESS OTHERWISE SPECIFIED DIMS ARE ANGLES RAD DO NOT SCALE DRAWING	DRAWN BY: DZ DATE: 07-06-09	PROJECT/REV: AD-8.4-4RU-RDS-101 SHEET 1 OF 1	SCALE SHEET 1 OF 1